Ensamblada

Galvanized

Pre-lacquered BL-Andreu

Pre-lacquered GR-Andreu

PVC Film Old Oak

Powder coated RAL

SIN SALIDA
SIN SALIDA
4
5

OFICINA
SEGUNDO P
HABITACIÓN 203-205
REUNIONES
OFICINA
CUIDADOS INTENSIVOS
BAÑOS
SERVICIOS
HABITACIÓN 201-202

Ensamblada

1 and 2 Leaf Door

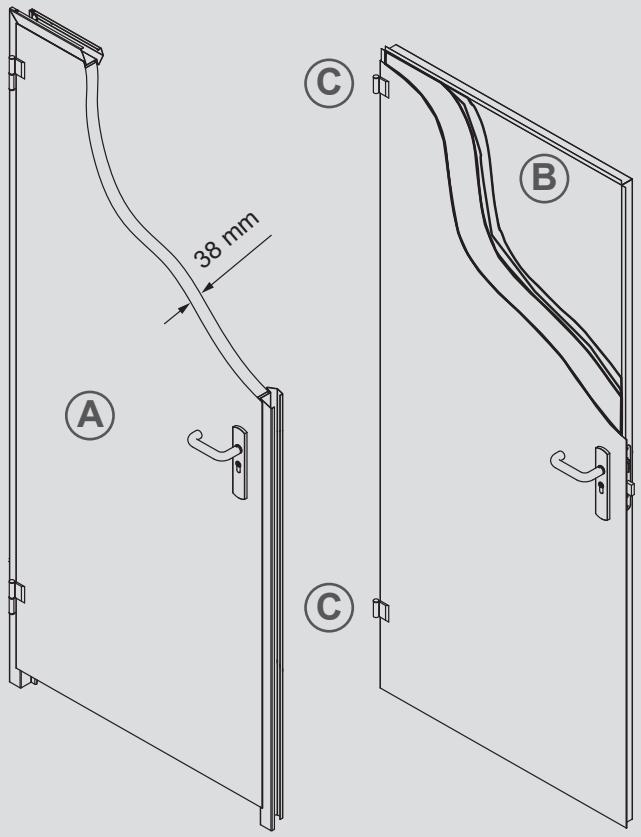

STRUCTURE

Two 0.5mm galvanized steel sheets assembled without welding (A).

Leaf thickness: 38mm.

Inner chamber: polyurethane injected at high pressure (B).

2 hinges at least, of galvanized steel in 2 different models:

- Ensamblada Model (C).
- Optionally you can choose: Model RF (D).

FRAME

CS4 corner frame.

C70 wrapping frame.

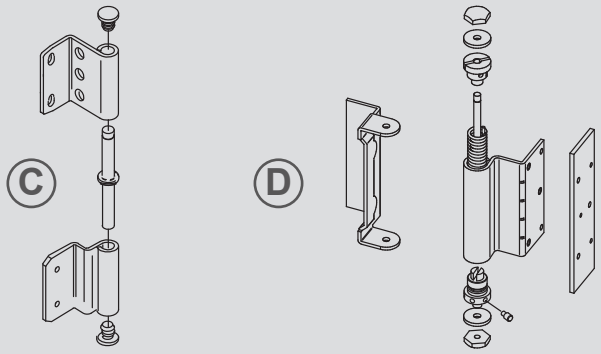

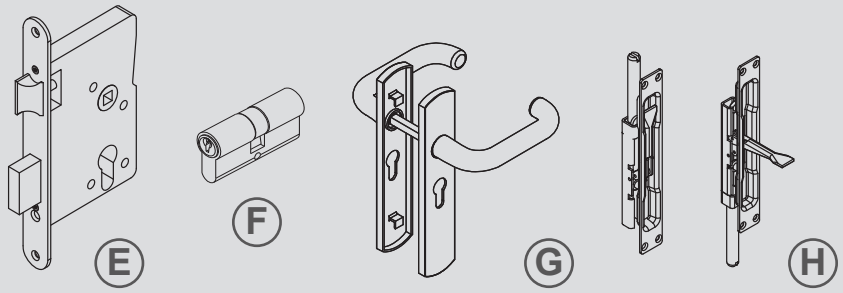

LOCKING AND DRIVING SYSTEM

Steel lock embedded in the sheet (E).

Brass cylinder 30x30 (F).

Set shield + handle with black nylon escutcheon (G).

In the double leaf ensamblada model, 2 embedded bolts are placed on the edge of the leaf as the drive in the inactive leaf (H).

One Leaf Ensamblada

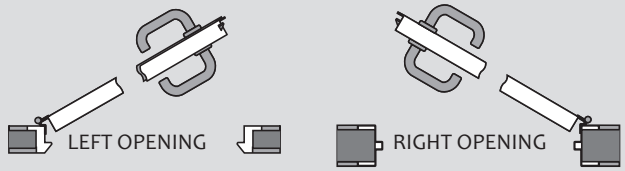

OPENING SENSES

MEASUREMENTS ONE LEAF

SECTION A-A'

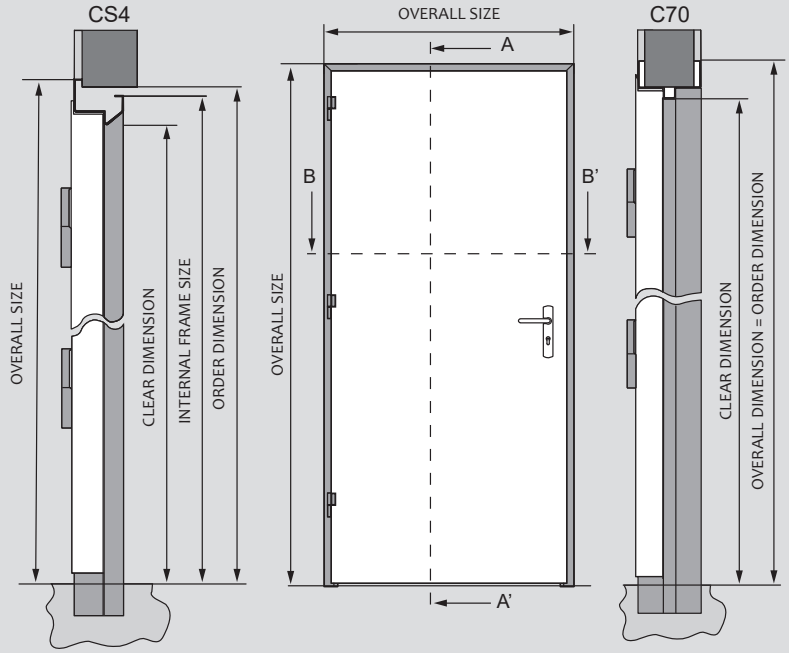

SECTION B-B'

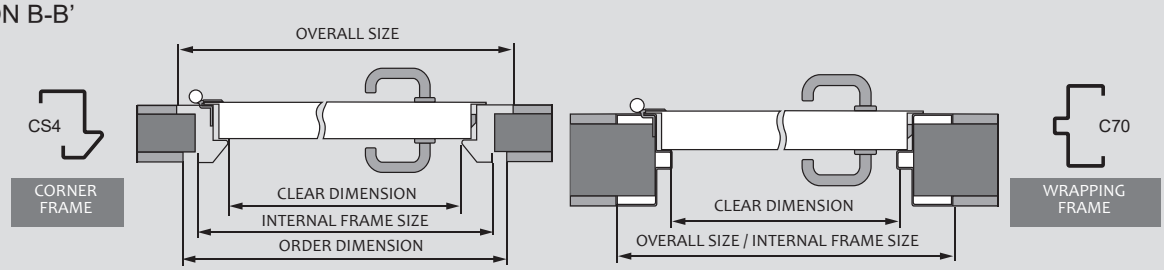

	Order Size		Clear Opening		Internal Frame		Overall (Ext. Frame)	
Frame	Width	Height	Width	Height	Width	Height	Width	Height
CS4	690	2045	600	2000	670	2035	710	2055
	690	2090	600	2045	670	2080	710	2100
	790	1490	700	1445	770	1480	810	1500
	790	1790	700	1745	770	1780	810	1800
	790	2045	700	2000	770	2035	810	2055
	790	2090	700	2045	770	2080	810	2100
	890	2045	800	2000	870	2035	910	2055
	890	2090	800	2045	870	2080	910	2100
	990	2045	900	2000	970	2035	1010	2055
	990	2090	900	2045	970	2080	1010	2100
	1090	2045	1000	2000	1070	2035	1110	2055
	1090	2090	1000	2045	1070	2080	1110	2100
	1190	2045	1100	2000	1170	2035	1210	2055
	1190	2090	1100	2045	1170	2080	1210	2100
Frame	Width	Height	Width	Height	Width	Height	Width	Height
C70	710	2055	600	2000	710	2055	710	2055
	710	2100	600	2045	710	2100	710	2100
	810	1500	700	1445	810	1500	810	1500
	810	1800	700	1745	810	1800	810	1800
	810	2055	700	2000	810	2055	810	2055
	810	2100	700	2045	810	2100	810	2100
	910	2055	800	2000	910	2055	910	2055
	910	2100	800	2045	910	2100	910	2100
	1010	2055	900	2000	1010	2055	1010	2055
	1010	2100	900	2045	1010	2100	1010	2100
	1110	2055	1000	2000	1110	2055	1110	2055
	1110	2100	1000	2045	1110	2100	1110	2100
	1210	2055	1100	2000	1210	2055	1210	2055
	1210	2100	1100	2045	1210	2100	1210	2100

Standard measurements in millimeters. Possibility of other measurements on request.

MEASUREMENTS DOUBLE LEAF

SECTION A-A’

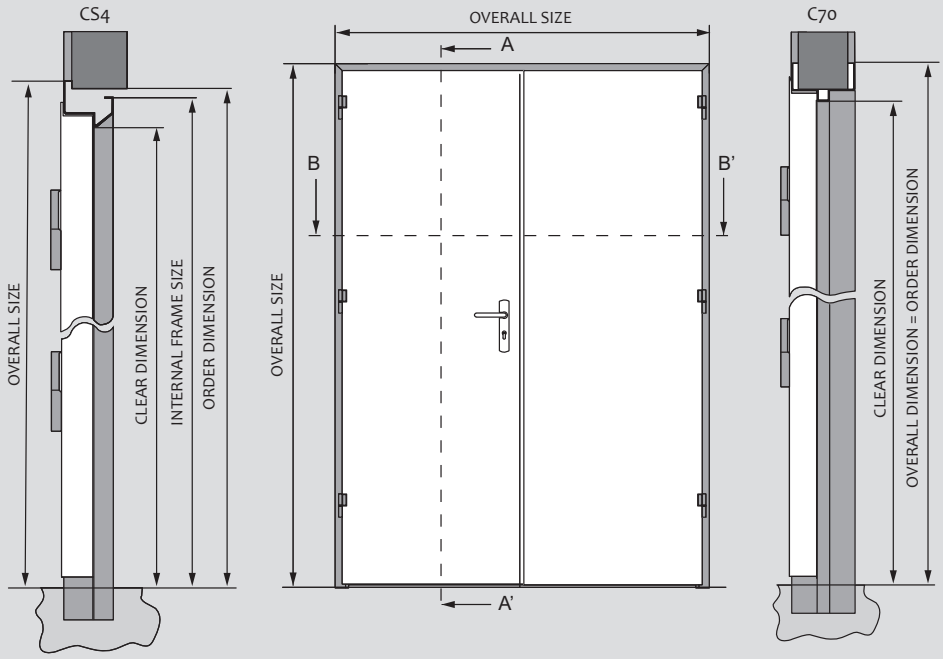

SECTION B-B’

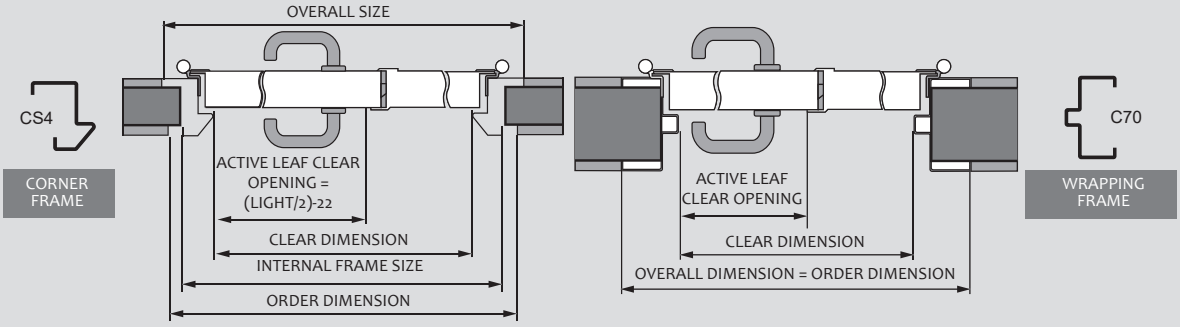

	Order Size		Clear Opening		Internal Frame		Overall (Ext. Frame)	
Frame	Width	Height	Width	Height	Width	Height	Width	Height
CS4	1530	2045	1440	2000	1510	2035	1550	2055
	1530	2090	1440	2045	1510	2080	1550	2100
	1730	2045	1640	2000	1710	2035	1750	2055
	1730	2090	1640	2045	1710	2080	1750	2100
	1930	2045	1840	2000	1910	2035	1950	2055
	1930	2090	1840	2045	1910	2080	1950	2100
Frame	Width	Height	Width	Height	Width	Height	Width	Height
C70	1550	2055	1440	2000	1550	2055	1550	2055
	1550	2100	1440	2045	1550	2100	1550	2100
	1750	2055	1640	2000	1750	2055	1750	2055
	1750	2100	1640	2045	1750	2100	1750	2100
	1950	2055	1840	2000	1950	2055	1950	2055
	1950	2100	1840	2045	1950	2100	1950	2100

Standard measurements in millimeters. Possibility of other measurements on request.

FIX PANEL

It is a special solution that Andreu offers to adapt doors to the spaces required in the works, ideal for especially large holes or as an aesthetic complement.

It has the same structure as the door.

Manufacturing options:

- Lateral / Top fix panel.
- Lateral / Top fix panel or glass with intermediate frame.
- Lateral / top fix panel without intermediate frame.

TOP FIX PANEL

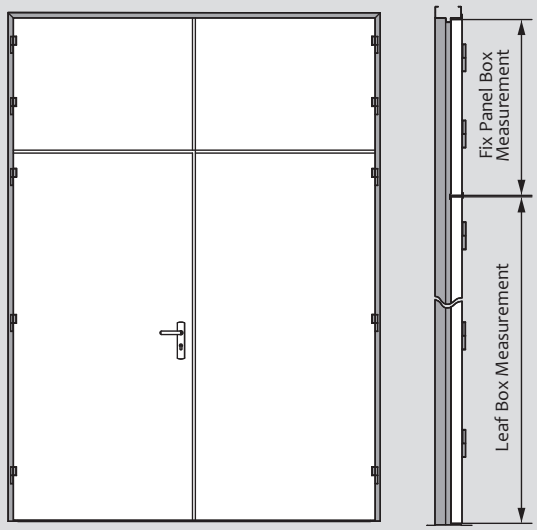

TOP FIX PANEL WITH INTERMEDIATE FRAME

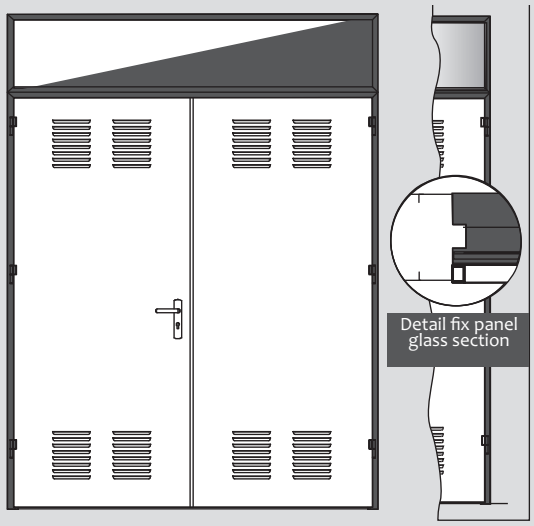

TOP FIX PANEL WITHOUT INTERMEDIATE FRAME

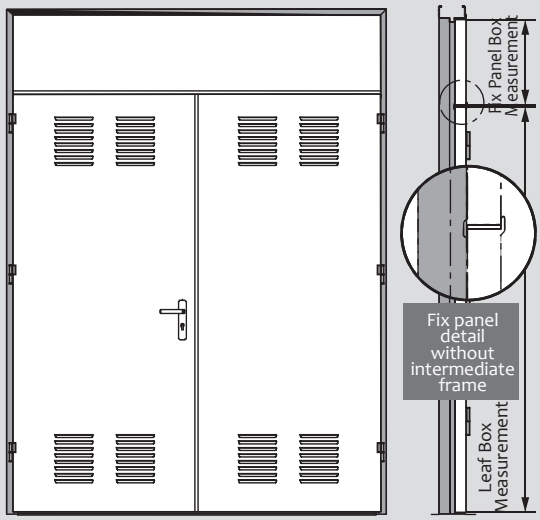

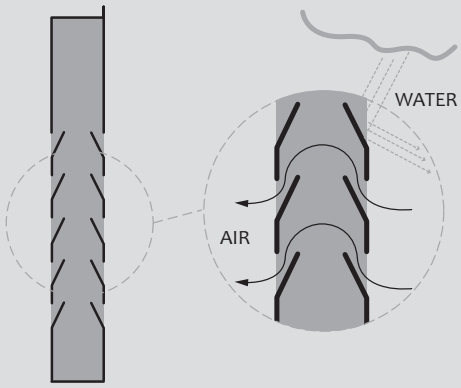

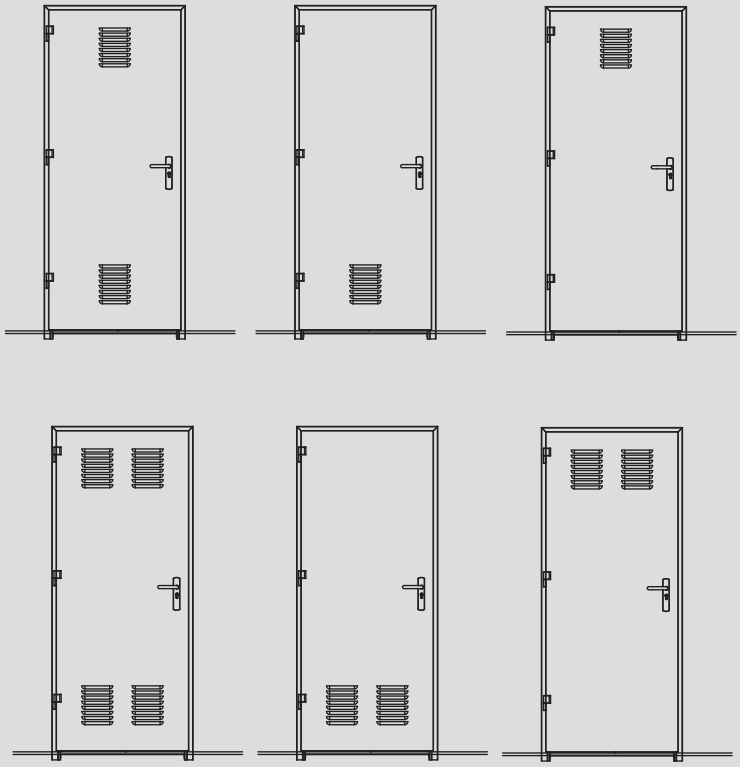

VENTILATION

The Ensamblada door can present a few drawings that allow the ventilation of the enclosures. These drawings do not allow the passage of water but it does allow the passage of air.

It can be placed in different provisions of the leaf: top, bottom, single or double.

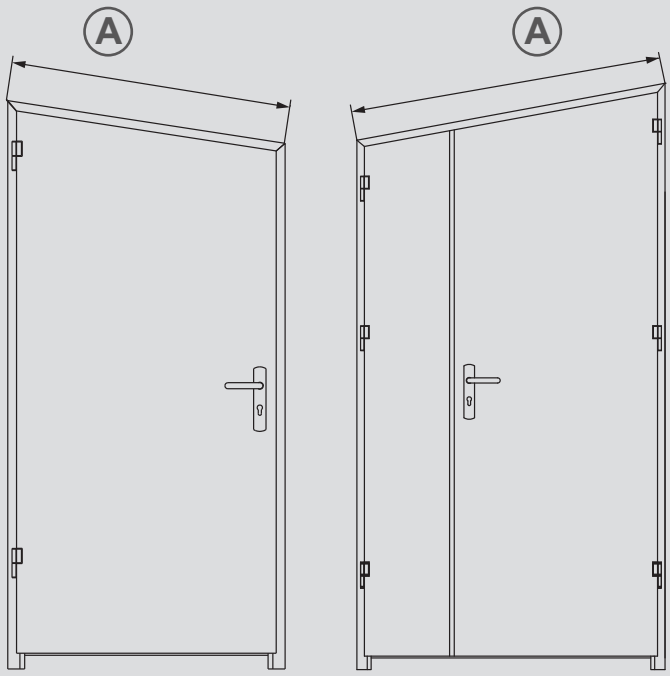

INCLINATION

The Ensamblada doors can fit any need or space, with the option to manufacturing them with a tilt or semi-tilt (A).