
# Versate




Lacquered BL-Andreu

PVC Film Old Oak



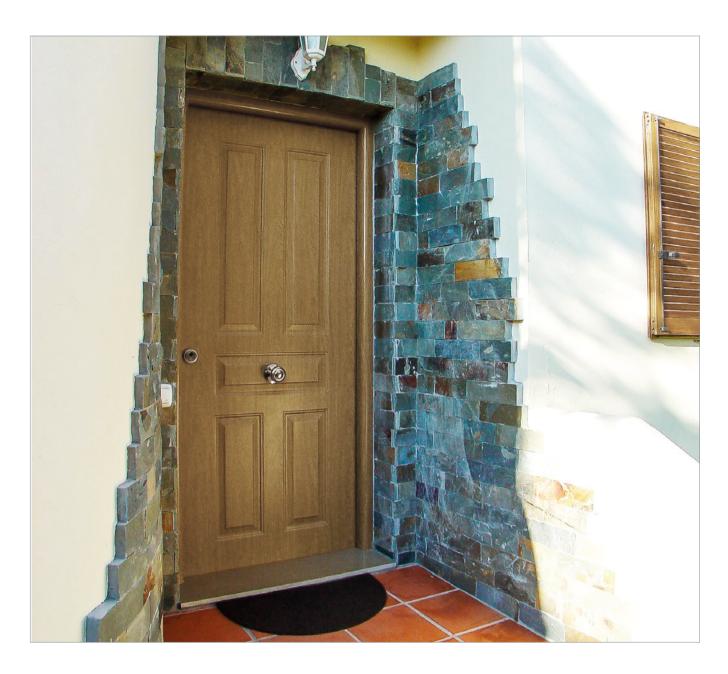



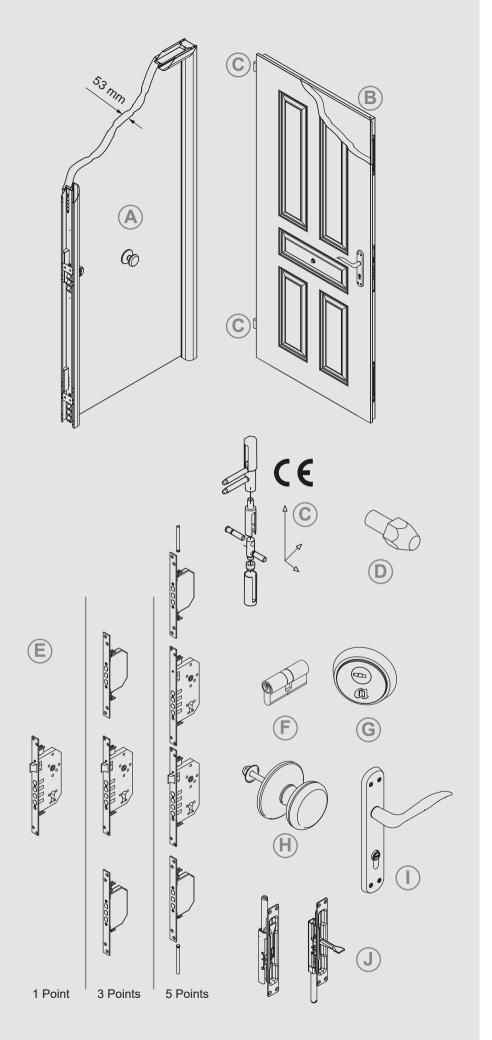

### **Versate**

1 and 2 Leaf Door

#### **STRUCTURE**

Two 1mm thick galvanized steel plates, assembled without welding (A).

Leaf thickness: 53mm.

Inner chamber: rigid polyurethane foam injected at high pressure (B).

2 brass-plated steel hinges adjustable in 3 directions with CE marking, complemented with nylon trim (C).

2 anti-crow bar bolts (D).

#### **FRAME**

CR8 non-corner frame.

Incorporates rubber seal.

## LOCKING AND DRIVING SYSTEM

Security lock with the possibility of locking at 1, 3 or 5 points (E).

Brass or nickel cylinder 30x45 (F).


On the outside, security anti-drilling shield (G) + knob handle (H).

On the inside, shield + handle with escutcheon (I).


2 bolts are placed in the double leaf model; embedded in the edge of the leaf, as the inactive leaf drive (J).

#### **MEASUREMENTS ONE LEAF**

#### SECTION A-A'

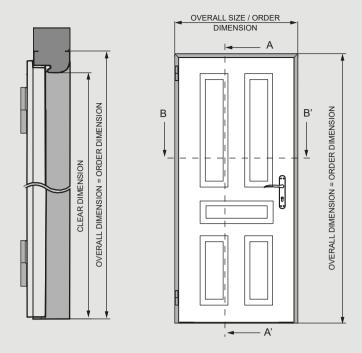

#### SECTION B-B'




	Order Size		Clear Opening		Internal Frame		Overall (Ext. Frame)	
Frame	Width	Height	Width	Height	Width	Height	Width	Height
CR8	910	2100	790	2040	910	2100	910	2100
	960	2100	840	2040	960	2100	960	2100
	1010	2100	890	2040	1010	2100	1010	2100


Standard measurements in millimeters. Possibility of other measurements on request.

#### **MEASUREMENTS DOUBLE LEAF**

#### SECTION A-A'

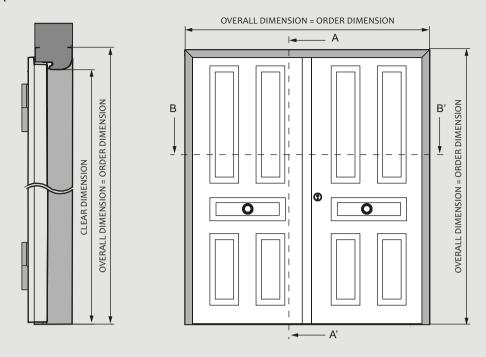

#### SECTION B-B'

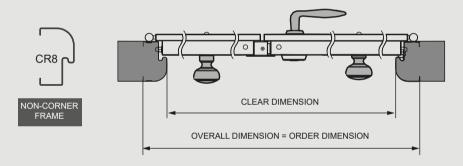

	Order Size		Clear Opening		Internal Frame		Overall (Ext. Frame)	
Frame	Width	Height	Width	Height	Width	Height	Width	Height
CR8	1760	2100	1640	2040	1760	2100	1760	2100
	1860	2100	1740	2040	1860	2100	1860	2100
	1960	2100	1840	2040	1960	2100	1960	2100

Standard measurements in millimeters. Possibility of other measurements on request.

### **DRAWING**

The leaf can have a light drawing (A) in 1 or 2 sides (B) either in one or in both leaves.

It offers several drawing designs (C).

